

# Versatile Network Connectivity to Meet Business Demands



Wireless Ready

Scanning Speed 30 ppm / 60 ipm

\* A4/Letter, Portrait, 300 dpi, Binary/Colour



Shareable and Cost Saving  
with Network Connectivity


Space Saving with  
Compact Design

Versatile Scanning with  
Various Scanning Options



## Shareable and Cost Saving with Network Connectivity


The variable network connectivity of KV-S1037X allows you to connect the scanner to your PC or mobile device over wired or wireless connection according to your business needs. This also saves you operation cost.

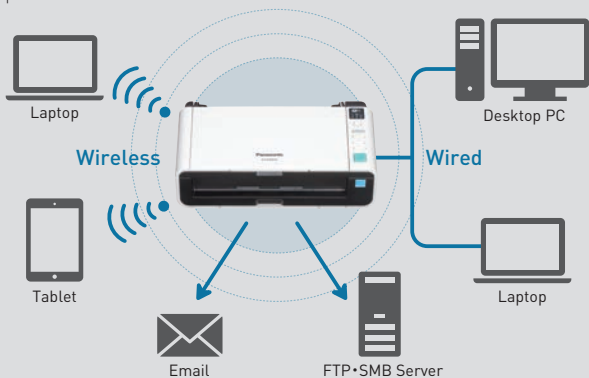

\* When using more than two PCs, OCR function of ICP is optional.  
\* Wired LAN and wireless LAN connections can not be used simultaneously.

## Space Saving with Compact Design

The compact body of KV-S1037X can fit in small and narrow spaces but it is packed with essential features to finish scanning jobs fast and efficient.



\* Clearance required to set the feed tray and exit tray

## Versatile Scanning with Various Scanning Options

Scanning various documents is made easy with KV-S1037X. No more problem when scanning a long paper, passport, bankbook, or even embossed cards at once.



\* Use the carrier sheet (KV-SS077) to scan passport and the mixed batch card guide to scan embossed cards.

## Specifications

Scanning Face	Duplex
Scanning Method	1 line colour CIS (300 dpi/600 dpi), Background: Black
Scanning Resolution*1	100 dpi - 600 dpi (1 dpi step) and 1,200 dpi (interpolated) Optical: 300 dpi/600 dpi (Automatic switch)
Scanning Speed*2	
A4/Letter, Binary/Colour (200 dpi, 300 dpi)	Simplex: 30 ppm, Duplex: 60 ipm
Double-Feed Detection	Ultrasonic (The length of documents that can be detected is 70 mm (2.8 in.) or more.)
Image Compression	MH, MMR, JPEG, JPEG2000
Binary Mode Halftone	Dither, Error Diffusion
ADF Document Size	Manual feeding: 48 mm x 54 mm - 216 mm x unlimited (1.9 in. x 2.1 in. - 8.5 in. x unlimited)*3 Automatic feeding: 48 mm x 54 mm - 216 mm x 356 mm (1.9 in. x 2.1 in. - 8.5 in. x 14 in.)
Thickness	Paper: 0.04 mm - 0.5 mm [1.6 mils - 19.7 mils] Passport*4: 3.0 mm (118.1 mils) (including carrier sheet) ISO format card: 0.76 mm (0.03 in.) Embossed card up to 1.24 mm (0.049 in.) Note: 1 mil = 0.001 in.
Weight	20 g/m <sup>2</sup> - 413 g/m <sup>2</sup> (5 lb. - 110 lb.)
Feed Tray Capacity	50 sheets (80 g/m <sup>2</sup> [21 lb.] High-quality woodfree paper)*5
Supported Operating System	Windows Vista® SP2 (32 bit/64 bit) Windows® 7 (32 bit/64 bit), Windows 8 (32 bit/64 bit) Windows 8.1 (32 bit/64 bit), Windows 10 (32 bit/64 bit) Windows Server® 2003 SP2 (32 bit/64 bit) Windows Server® 2003 R2 SP2 (32 bit/64 bit) Windows Server® 2008 SP2 (32 bit/64 bit) Windows Server® 2008 R2 SP1 (64 bit) Windows Server® 2012 (64 bit), Windows Server® 2016 (64 bit) Mac OS X 10.8 - 10.11, macOS 10.12 - 10.14, Red Hat® Enterprise Linux® Desktop 6/7, Ubuntu® 12/14/15/16/17/18/19

- \*1 When scanning a document larger than A5 size at resolutions over 600 dpi, the scanning may fail due to insufficient memory.
- \*2 The scanning speed is the maximum speed of the scanner hardware. It does not include software processing time, data transfer time, etc. The scanning speed measurement is based on Panasonic's measuring method.
- \*3 Using Long paper mode the images will be split into sizes determined by the Paper Size setting.
- \*4 Use the carrier sheet (KV-SS077) to scan passport. Depending on the condition (operating environment, dirt, scratches, etc.) of the carrier sheet or passport, the image processing function may not work properly. Scan beforehand to confirm the scanned image.
- \*5 Depending on the paper type or operating environment (temperature, humidity, etc.), the unit may not feed the documents properly. When paper weight is more than 209 g/m<sup>2</sup> (55 lb.): 5 sheets (A4, High-quality woodfree paper). When installed the mixed batch card guide: 20 sheets (80 g/m<sup>2</sup> [21 lb.], High-quality woodfree paper).
- \*6 When using the wireless LAN connection, the interface is USB 2.0.
- \*7 Values differ depending on the country.
- \*8 The power requirement differs depending on the country/area.
- \*9 If connected to a network device (hub, router, etc.) that supports IEEE802.3az.
- \*10 Presto! PageManager and Presto! BizCard are either registered trademarks or trademarks of NewSoft Technology Corporation in the United States and / or other countries.
- \*11 The edition of Presto! PageManager 9 included with this unit is different to the commercially available one.
- \*12 USB Scanning only.

Interface	USB 3.1 Gen1 (backward compatible)*6 LAN (10Base-T/100Base-TX/1000Base-T), Wireless LAN (IEEE802.11n/g/b)
Recommended Web Browser	Internet Explorer 11, Mozilla Firefox (latest version), Google Chrome (latest version)
Wireless LAN	Communication standard: IEEE802.11n/g/b Frequency range*7 (center frequency) / Channel: KV-S1037X <b>U X M L</b> : 2.412 GHz - 2.472 GHz (1 - 13ch) KV-S1037X <b>M</b> : 2.412 GHz - 2.462 GHz (1 - 11ch)
External Dimensions (W X D X H)	303 mm x 177 mm x 137 mm (12.0 in. x 7.0 in. x 5.4 in.)
Weight	2.7 kg (5.9 lb.)
Power Requirement*8	AC 100 - 240 V, 50/60 Hz
Power Consumption	Maximum (Scanning): 26 W or less (DC 16 V 1.5 A) Minimum (Ready): 6 W or less Sleep: 2.0 W or less (USB connection), 2.0 W or less (Wired LAN connection)*9, 2.0 W or less (Wireless LAN connection) Power Off: 0.3 W or less
Operating Environment	Temperature: 5 °C - 35 °C (41 °F - 95 °F), Humidity: 20 % - 80 % RH
Storage Environment	Temperature: -10 °C - 50 °C (14 °F - 122 °F), Humidity: 8 % - 75 % RH
Accessories	DVD-ROM: Device driver, ISIS driver software, TWAIN driver software, WIA driver software, User utility, Scan Button Setting Tool, Image Capture Plus, Operating Manual, Control sheet, Presto! PageManager 9*10*11, Presto! BizCard 6*10 Quick Installation Guide, Power cord, AC adaptor, 1.5 m USB cable (USB 3.1), Mixed batch card guide, Shading paper, Guidance sticker, Correction sticker
Options	Options Flatbed Scanner: KV-SS081*12, Roller exchange kit: KV-SS058, Roller cleaning paper: KV-SS03, Carrier sheet: KV-SS077

### Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.
- ISIS is a registered trademark or trademark of Open Text Corporation.
- Windows, Windows Vista, Windows Server and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Mac, OS X and macOS are trademarks of Apple Inc., registered in the U.S. and other countries.
- Linux is a registered trademark or a trademark of Linus Torvalds in the United States and other countries.
- Red Hat and Red Hat Enterprise Linux are registered trademarks or trademarks of Red Hat, Inc. in the United States and other countries.
- Ubuntu is a registered trademark or a trademark of Canonical Ltd. in the United States and other countries.
- Mozilla and Firefox are registered trademarks of the Mozilla Foundation.
- Google and Google Chrome are registered trademarks of Google LLC.
- Wi-Fi, Wi-Fi Direct and the Wi-Fi CERTIFIED logo are registered trademarks or trademarks of Wi-Fi Alliance.
- All other brand or product names are the property of their respective holders.

This product is designed to reduce hazardous chemical substances in accordance with the RoHS directive.

- All photographs in this brochure are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.



As an ENERGY STAR® partner, Panasonic has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



DISTRIBUTED BY:

# Panasonic

Document Scanner: <https://panasonic.net/cns/office/products/scanner/>

Printed in Japan MG-SCNL035EN 1908NSP/FP-U3